

THE COMPLETE FAÇADE SOLUTION
SELF LEVELLING FIRE RATED
SEALANT

BUILDING TRUST




SELF LEVELLING SEALANT FOR HORIZONTAL JOINTS TO PREVENT THE SPREAD OF FIRE AND SMOKE

Optimised for floor joint applications, Sikasil® FS-665 SL can be used in horizontal joints between curtain wall facades and floor slabs to prevent spreading of fire and smoke. It is also suitable in other industrial applications where good UV, thermal and fire resistance are required.

Features and Benefits

- Up to 4 hours fire resistance according to EN 11925-2 / din 4102-b1; up to 4 hours insulation and integrity (BS 476, part 20)
- Meeting relevant industry standards such as: ISO 11600 25 LM F & G, ASTM C 920
- Outstanding UV and weathering resistance
- CE-mark according to EN 15651-4:2012, PW INT 25 LM, certified by Control Body 1119
- Easy to use no mixing required

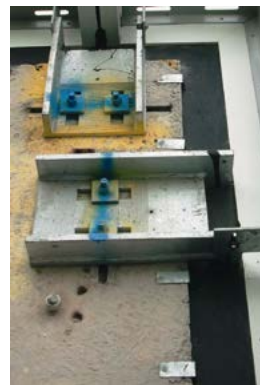

Sikasil® FS-665 SL

Low modulus pourable silicone sealant designed for fire rated horizontal joints between curtain wall facades and floor slabs.



What can Sika UK offer?

- Local supply
- Technical support
- Independently tested
- Readily Available
- Application Training

MORE INFORMATION

Contact: Ali Aydogan | Mobile: : 07786 933402
Email: aydogan.ali@uk.sika.com
www.sika.co.uk/facades

Connect with Ali on LinkedIn:
[linkedin.com/in/ali-aydoğan-b567b91b8](https://www.linkedin.com/in/ali-aydoğan-b567b91b8)

Our most current General Sales Conditions shall apply.

Please consult the most current local Product Data Sheet prior to any use..



SIKA LIMITED

Head Office
Watchmead
Welwyn Garden City
Hertfordshire, AL7 1BQ
United Kingdom

Contact

Phone +44 1 707 394444
E-Mail enquiries@uk.sika.com
www.sika.co.uk
@SikaLimited

BUILDING TRUST

